


1ST LID B5000-190

"PRIMARY" WIRING

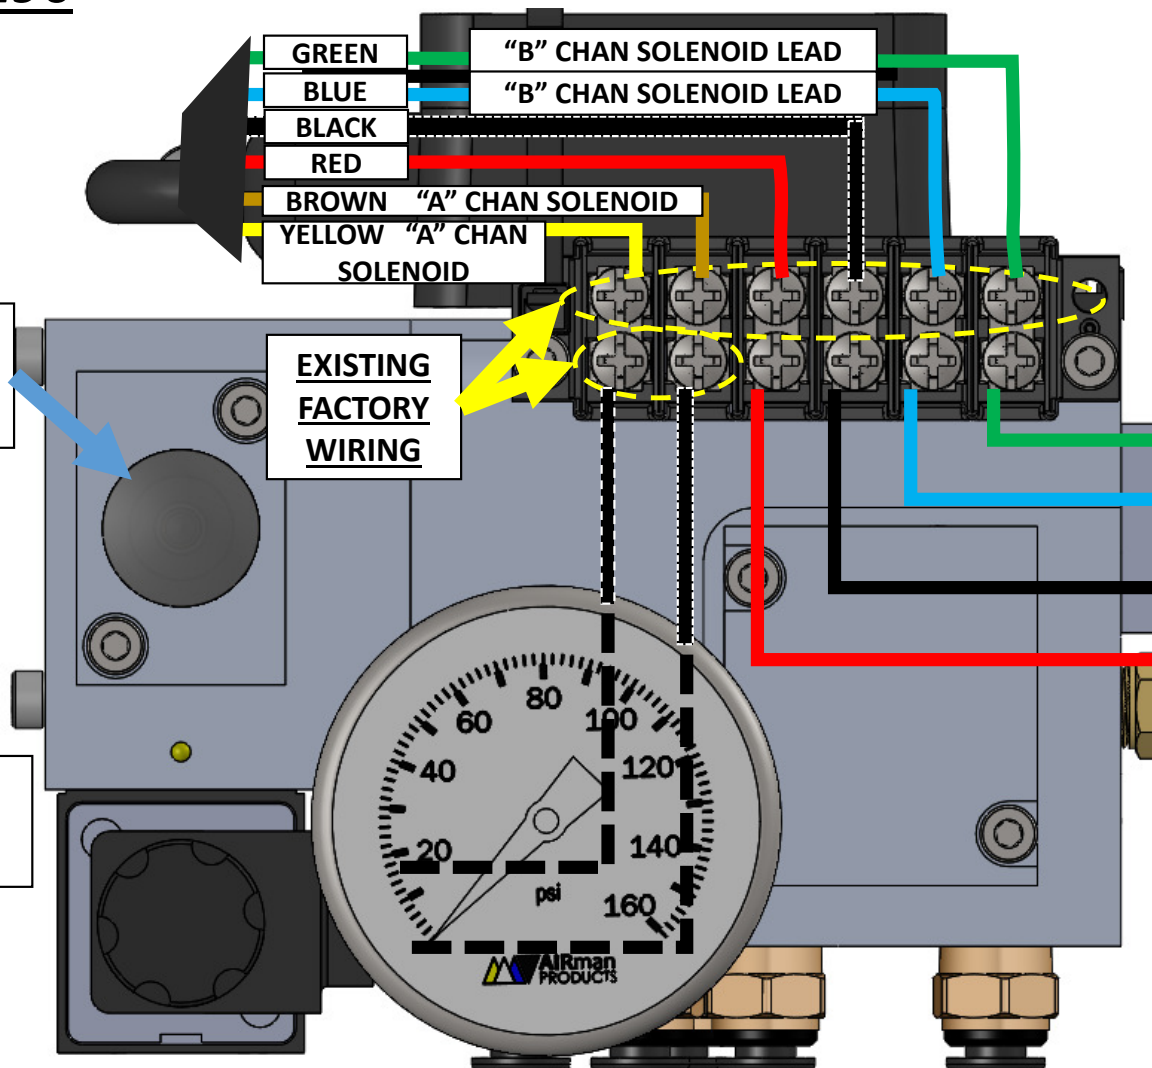

END USER CONNECTIONS

- OPTIONAL "B" CHAN SOLENOID LEAD
- OPTIONAL "B" CHAN SOLENOID LEAD
- GROUND CONNECTION (-)
- +12 VDC POWER IN

MANUAL OVER-RIDE KNOB
PUSH-IN TO ALLOW REMOTE
SOLENOID CONTROL

**EXISTING
FACTORY
WIRING**

**WHITE LINE IS ANTENNAE
(NOT SHOWN)
DO NOT MODIFY**



2ND LID B5000-191 "SECONDARY" WIRING



END USER CONNECTIONS

NO RELAY IN CHILD ENCLOSURE

"B" CHAN SOLENOID LEAD
OR
"B" CHAN SOLENOID LEAD

+12 VDC POWER IN
GROUND CONNECTION (-)

MANUAL OVER-RIDE KNOB
PUSH-IN TO ALLOW REMOTE SOLENOID CONTROL

EXISTING FACTORY WIRING

